(19) World Intellectual Property Organization

International Bureau



(43) International Publication Date 30 June 2005 (30.06.2005)

(10) International Publication Number WO 2005/058532 A1

- (51) International Patent Classification7: B23C 3/00, 5/10
- (21) International Application Number:

PCT/JP2004/019464

(22) International Filing Date:

17 December 2004 (17.12.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2003-418939 60/534.098

17 December 2003 (17.12.2003) 5 January 2004 (05.01.2004)

- (71) Applicant (for all designated States except US): SHOWA DENKO K.K. [JP/JP]; 13-9, Shiba Daimon 1-chome, Minato-ku, Tokyo 105-8518 (JP).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): ASAKAWA, Jun [JP/JP]; c/o Showa Denko K.K., 7840, Nagauchi, Kitakata-shi, Fukushima 966-0845 (JP).
- (74) Agents: FUKUDA, Kenzo et al.; Kashiwaya Bldg., 6-13, Nishishinbashi 1-chome, Minato-ku, Tokyo 105-0003 (JP).


- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD FOR PRODUCING FORGING DIE, FORGING DIE AND FORGED ARTICLE

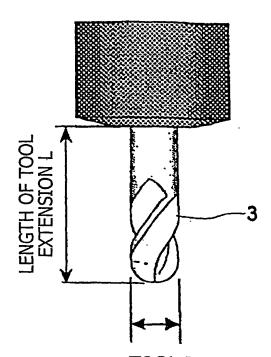

TOOL DIAMETER D = 2R

(57) Abstract: A forging die production method comprising a cutting step which employs, as a cutting tool, a ball end mill having a surface which has undergone a hardening treatment and in which a forging die material is cut under conditions where a length of tool extension L (mm), radius R (mm) of a cutting edge of the ball end mill, spindle speed A (rpm) and feed rate B (mm/min) satisfy $(B/A)^2 x (L/(2xR)) = 0.01$ to 0.05. A forging die is produced through the forging die production method. A forged article is produced through forging by use of the produced forging die.